



SOLID EUROPEAN OAK


BY HEIRLOOM OAK

BOARDS BY HEIRLOOM OAK




ANTIQUE

"ANTIQUE" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21mm THICK OAK, 200mm WIDE BOARDS X RANDOM LENGTHS UP TO 2400mm LONG

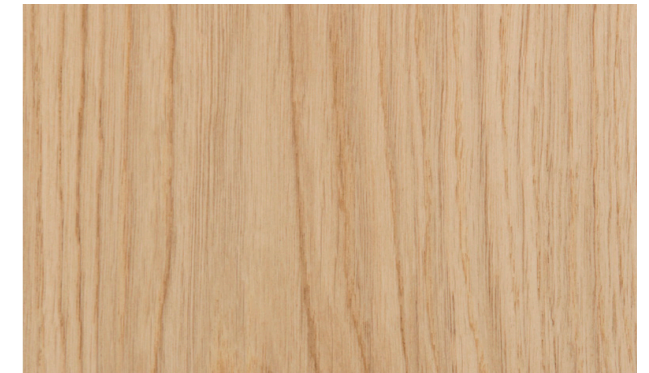


NATURAL

"NATURAL" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21mm THICK OAK, 200mm WIDE BOARDS X RANDOM LENGTHS UP TO 2400mm LONG

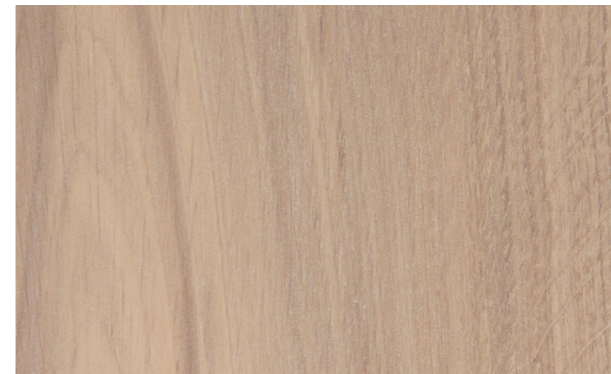


BLANC LAVER

"BLANC LAVER" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21MM THICK OAK, 190mm WIDE BOARDS X RANDOM LENGTHS UP TO 2200mm LONG

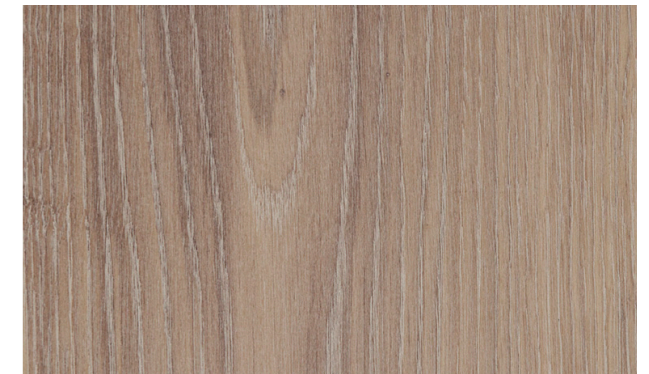

ASPEN

"ASPEN" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21MM THICK OAK, 190mm WIDE BOARDS X RANDOM LENGTHS UP TO 2400mm LONG

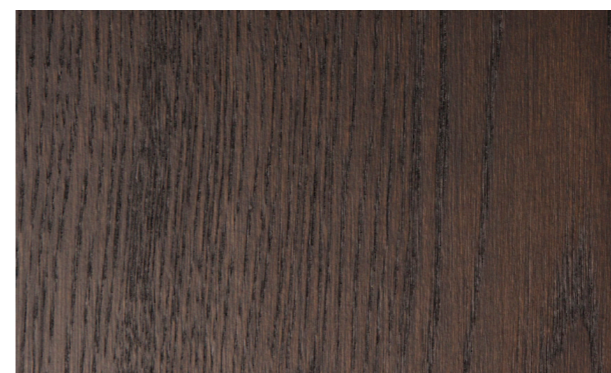

SPAZIO NERO

"SPAZIO NERO" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21mm THICK OAK, 190mm WIDE BOARDS X RANDOM LENGTHS UP TO 2400mm LONG



HERRINGBONE BY HEIRLOOM OAK




ANTIQUE

"ANTIQUE" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21MM THICK OAK, 140mm WIDE BOARDS X 600mm



BLANC LAVER

"BLANC LAVER" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21MM THICK OAK, 140mm WIDE BOARDS X 600mm

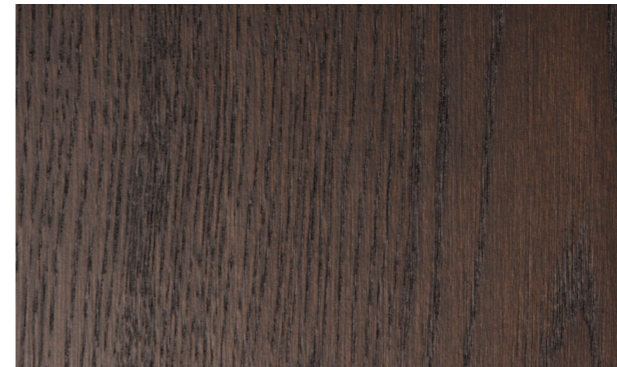

BRAZIL

"BRAZIL" SOLID EUROPEAN OAK RUSTIC FLOORING COLOUR , BRUSHED SURFACE FINISHED WITH 3 COATS OF HARD WAX OIL SOLID 21MM THICK OAK, 135mm WIDE BOARDS X 600mm

ABOUT OUR OAK

Through our Heirloom Oak Flooring range we offer authentic 100% European Solid Oak flooring solutions to those who value the timeless elegance and uniqueness that majestic Oak brings.

OUR RANGE

Our European 100% Solid Oak floors are supplied in solid 21mm thick, 190mm wide, random length boards up to with a maximum length of 2900mm, solid 21mm thick, 600mm x 135mm tongue and groove Herringbone, or solid 21mm thick 650 x 135mm tongue and groove Chevron. The Oak comes pre stained and oiled, in both Architectural and Vintage finishes ready to lay and walk on, no further treatment is required. Century old Oak craft traditions have shown ways to create a surface that is both beautiful and durable. Light brushing subtly enhances the Oak grain, allowing its classic features to be enriched by the quality European stains. For interiors where a reclaimed feel is desired our craftsmen have created a distressed surface, reminiscent of a well-loved industrial floor and showing the resilience and hardness of this extraordinary timber.

FINISH & MAINTAINENCE

The choice of surface protection cannot be surpassed by the tradition of applying oil to the Oak flooring. After staining, three coats of hard wax oil are applied to each board. Each coat is left to dry naturally to be absorbed slowly into the grain. We use and recommend "Woca" hard wax oil finish. Their cleaners, stains and maintenance oils are all environmentally friendly and manufactured in Denmark for over 60 years. Please visit website <http://www.alexlind.com.au/brands/woca> for details.

SUSTAINABILITY – AN INVESTMENT FOR GENERATIONS

Being 100% Solid Oak our floors are a symbol of strength, durability and natural beauty that transcend time, an investment that can pass from one generation to the next. An heirloom. By selecting environmentally sustainable Oak logs sourced from European Oak plantation forests that carry the internationally recognised Forest Stewardship Council (FSC) certification we preserve and protect our natural resources and craft traditions of majestic solid Oak flooring for the future.

HEALTHY LIVING

Putting health and safety at the forefront of everything we do, our Oak Boards are finished with three coats of toxin free natural vegetable based Hard Wax Oil. All our timber coatings are fully compliant with both the Australian and European Union standards for VOC (Volatile Organic Compound) emissions. Hard Wax Oil coatings are the traditional coatings used to preserve and protect Oak floors.

INSTALLATION

Our solid Oak boards are tongue and grooved on all sides. It is recommended that they be secret nailed. As Oak exhibits less moisture sensitivity than Australian hardwoods, it does not require top nailing. It is highly recommended that you obtain professional advice on installation particular to your building requirements. Heirloom Oak floors are a gift from nature to be admired as they always have been, for generations